

PUMPS FOR DEEP WELLS

Bore-hole pumps with built-in integrated electronics. Pump body in technopolymer and stainless steel shaft.
Available with 3 or 4 impellers in hard wearing technopolymer (silent running).
Continuous service motor with overload cut out. Includes 15 m of cable



**AUTOMATIC START&STOP - DRY RUN PROTECTION
NO EXTERNAL CONTROL SYSTEM NEEDED**



TALLAS SE 60/3



- 1 x 220-240V
- P1 900 W
- Q MAX 5700 l/h
- H MAX 36 m
- 1"
- 11 Kg



H (m)	Q (l/h)
36 m	0 l/h
34 m	600 l/h
30 m	1800 l/h
23 m	3000 l/h
15 m	4200 l/h
10 m	4800 l/h
0 m	5700 l/h

TALLAS SE 60/4




- 1 x 220-240V
- P1 1100 W
- Q MAX 5700 l/h
- H MAX 48 m
- 1"
- 11 Kg



H (m)	Q (l/h)
48 m	0 l/h
45 m	600 l/h
35 m	2400 l/h
25 m	3600 l/h
15 m	4500 l/h
5 m	5400 l/h
0 m	5700 l/h

PUMPS FOR DEEP WELLS

Bore-hole pump comprising a float switch with adjustable on/off feature.
 With pump body in technopolymer, stainless steel shaft and 3 or 4 impellers in hard wearing technopolymer (silent running).
 Continuous service motor with overload cut out.
 Includes 15 m of cable

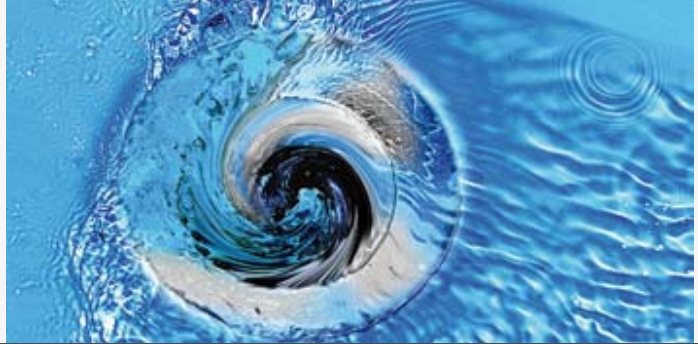

TALLAS SA 60/3









-  1 x 220-240V
-  P1 900 W
-  Q MAX 5700 l/h
-  H MAX 36 m
-  1"
-  10,5 Kg

	
36 m	0 l/h
34 m	600 l/h
30 m	1800 l/h
23 m	3000 l/h
15 m	4200 l/h
10 m	4800 l/h
0 m	5700 l/h

TALLAS SA 60/4



-  1 x 220-240V
-  P1 1100 W
-  Q MAX 5700 l/h
-  H MAX 48 m
-  1"
-  10,7 Kg

	
48 m	0 l/h
45 m	600 l/h
35 m	2400 l/h
25 m	3600 l/h
15 m	4500 l/h
5 m	5400 l/h
0 m	5700 l/h